

METRONOME-B


Metronome-B is a linear LED luminaire equipped with 20, 28, or 36 lenses, recessed behind a grid-shaped louver for use in modular grid ceilings. This LED luminaire offers a completely new lighting solution for effective illumination with an architectural aesthetic. A choice can be made between UGR< 19 optics (standard) and UGR< 16.

- Architectural aesthetic with 20, 28, or 36 optics
- Choice between UGR< 19 and UGR< 16 optics
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

Categories: [Strip grid fixtures](#)



PRODUCT IMAGES

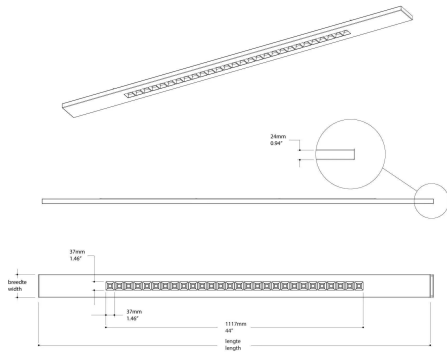

Metronome-B is a linear LED luminaire equipped with 20, 28, or 36 lenses, recessed behind a grid-shaped louver for use in modular grid ceilings. This LED luminaire offers a completely new lighting solution for effective illumination with an architectural aesthetic. A choice can be made between $UGR < 19$ optics (standard) and $UGR < 16$.

- Architectural aesthetic with 20, 28, or 36 optics
- Choice between $UGR < 19$ and $UGR < 16$ optics
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

NOTES

ADDITIONAL INFORMATION

Air extraction	Optional
Armaturefficiëntie	>140lm/W
Bevestiging	Recessed
C-Haak hoogte	N/A
C-haakhoogte	n.v.t.
CIE Flux code	93 100 100 100 100
Driver positie	Attached to the fixture, Loose driver
Energielabel	A++
Family	Metronome
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	<19
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class II
Kleurconsistentie (SDCM)	SDCM=3
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI)	CRI90, CRI80
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Luchtafzuiging	Optioneel
Material	Acrylic, Steel
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Ambient temperature	-20°C / +40°C
Optics	Lens en louver
Oriëntatie	Down
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Productkleur	On request
Producttoepassing	Education, Hospitality, Office, Public spaces
Self-adhesive dust cover	Optional

Verpakkingsafmetingen	Bulkverpakking
Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Voltage / frequentie	220-240V, 50 / 60Hz
Shape	Rectangular
Zelfklevende stofkap	Optioneel

PHOTOMETRIC DATA

12.830 Metronome-B 28 15W 2100lm 3000K CRI80 UGR16 G7
 12.830 Metronome-B 28 17W 2450lm 3000K CRI80 UGR16 G7
 12.830 Metronome-B 28 20W 2800lm 3000K CRI80 UGR16 G7
 12.830 Metronome-B 28 22W 3150lm 3000K CRI80 UGR16 G7
 12.830 Metronome-B 28 26W 3700lm 3000K CRI80 UGR16 G7
 12.840 Metronome-B 28 15W 2200lm 4000K CRI80 UGR16 G7
 12.840 Metronome-B 28 17W 2600lm 4000K CRI80 UGR16 G7
 12.840 Metronome-B 28 20W 2950lm 4000K CRI80 UGR16 G7
 12.840 Metronome-B 28 22W 3300lm 4000K CRI80 UGR16 G7
 12.840 Metronome-B 28 26W 3850lm 4000K CRI80 UGR16 G7

12.830 Metronome-B 28 15W 2250lm 3000K CRI80 UGR19 G7
 12.830 Metronome-B 28 17W 2600lm 3000K CRI80 UGR19 G7
 12.830 Metronome-B 28 20W 3000lm 3000K CRI80 UGR19 G7
 12.830 Metronome-B 28 22W 3350lm 3000K CRI80 UGR19 G7
 12.830 Metronome-B 28 26W 3950lm 3000K CRI80 UGR19 G7
 12.840 Metronome-B 28 15W 2350lm 4000K CRI80 UGR19 G7
 12.840 Metronome-B 28 17W 2750lm 4000K CRI80 UGR19 G7
 12.840 Metronome-B 28 20W 3150lm 4000K CRI80 UGR19 G7
 12.840 Metronome-B 28 22W 3550lm 4000K CRI80 UGR19 G7
 12.840 Metronome-B 28 26W 4150lm 4000K CRI80 UGR19 G7

12.830 Metronome-B 36 17W 2350lm 3000K CRI80 UGR16 G7
 12.830 Metronome-B 36 19W 2750lm 3000K CRI80 UGR16 G7
 12.830 Metronome-B 36 22W 3150lm 3000K CRI80 UGR16 G7
 12.830 Metronome-B 36 25W 3550lm 3000K CRI80 UGR16 G7
 12.830 Metronome-B 36 29W 4150lm 3000K CRI80 UGR16 G7
 12.840 Metronome-B 36 17W 2500lm 4000K CRI80 UGR16 G7
 12.840 Metronome-B 36 19W 2900lm 4000K CRI80 UGR16 G7
 12.840 Metronome-B 36 22W 3300lm 4000K CRI80 UGR16 G7
 12.840 Metronome-B 36 25W 3750lm 4000K CRI80 UGR16 G7
 12.840 Metronome-B 36 29W 4350lm 4000K CRI80 UGR16 G7

12.830 Metronome-B 36 17W 2550lm 3000K CRI80 UGR19 G7
 12.830 Metronome-B 36 19W 2950lm 3000K CRI80 UGR19 G7
 12.830 Metronome-B 36 22W 3350lm 3000K CRI80 UGR19 G7
 12.830 Metronome-B 36 25W 3800lm 3000K CRI80 UGR19 G7
 12.830 Metronome-B 36 29W 4400lm 3000K CRI80 UGR19 G7
 12.840 Metronome-B 36 17W 2650lm 4000K CRI80 UGR19 G7
 12.840 Metronome-B 36 19W 3100lm 4000K CRI80 UGR19 G7

12.840 Metronome-B 36 22W 3550lm 4000K CRI80 UGR19 G7

12.840 Metronome-B 36 25W 4000lm 4000K CRI80 UGR19 G7

12.840 Metronome-B 36 29W 4650lm 4000K CRI80 UGR19 G7

LDT / PHOTOMETRICS DOWNLOADS

LDT / Photometrics downloads

All downloads can be found centrally per family at

<https://atomis.nl/ldt-photometrics/>