

## **METRONOME-B**

Metronome-B is a linear LED luminaire equipped with 20, 28, or 36 lenses, recessed behind a grid louver for use in bandrastrer ceilings. This LED luminaire is a completely new lighting solution for effective illumination with an architectural look. Choose between UGR< 19 optics (standard) and UGR< 16.

- Architectural aesthetic with 20, 28, or 36 optics
- Choice of UGR< 19 or UGR< 16 optics.
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

### **Downloads**


[Photometrics Metronome-B](#)

**Create your own product, download the PDF specification sheet or add to the quotation:**

**Categories:** [Strip grid fixtures](#)



## PRODUCT IMAGES

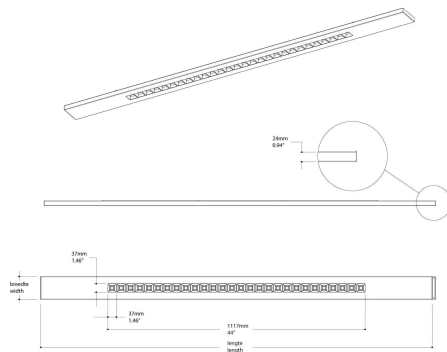

Metronome-B is a linear LED luminaire equipped with 20, 28, or 36 lenses, recessed behind a grid louver for use in bandrastrer ceilings. This LED luminaire is a completely new lighting solution for effective illumination with an architectural look. Choose between UGR < 19 optics (standard) and UGR < 16.

- Architectural aesthetic with 20, 28, or 36 optics
- Choice of UGR < 19 or UGR < 16 optics.
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

### Downloads

[Photometrics Metronome-B](#)

**Create your own product, download the PDF specification sheet or add to the quotation:**

## NOTES

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Air extraction</b>	Optional
<b>Armaturefficiëntie</b>	>140lm/W
<b>Bevestiging</b>	Recessed
<b>C-Haak hoogte</b>	N/A
<b>C-haakhoogte</b>	n.v.t.
<b>CIE Flux code</b>	93 100 100 100 100
<b>Driver positie</b>	Attached to the fixture, Loose driver
<b>Energielabel</b>	A++
<b>Family</b>	Metronome
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Glare (UGR)</b>	<19
<b>IP-class</b>	IP20 (upwards)/IP40 (downwards)
<b>Isolatieklasse</b>	Class II
<b>Kleurconsistentie (SDCM)</b>	SDCM=3
<b>Kleurtemperatuur</b>	Tunable White, 2700K, 3000K, 3500K, 4000K
<b>Color Rendering Index (CRI)</b>	CRI90, CRI80
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming, Optional
<b>Luchtafzuiging</b>	Optioneel
<b>Material</b>	Acrylic, Steel
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Ambient temperature</b>	-20°C / +40°C
<b>Optics</b>	Lens en louver
<b>Oriëntatie</b>	Down
<b>Packaging dimensions</b>	Bulk packaging
<b>Powerfactor</b>	>9
<b>Primaire aansluitingen</b>	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
<b>Productkleur</b>	On request
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Self-adhesive dust cover</b>	Optional

<b>Verpakkingsafmetingen</b>	Bulkverpakking
<b>Verwachte levensduur</b>	L90B50@60,000h (Tq 25°C)
<b>Voltage / frequentie</b>	220-240V, 50 / 60Hz
<b>Shape</b>	Rectangular
<b>Zelfklevende stofkap</b>	Optioneel

## PHOTOMETRIC DATA

12.830 Metronome-B 28 15W 2100lm 3000K CRI80 UGR16 G7  
12.830 Metronome-B 28 17W 2450lm 3000K CRI80 UGR16 G7  
12.830 Metronome-B 28 20W 2800lm 3000K CRI80 UGR16 G7  
12.830 Metronome-B 28 22W 3150lm 3000K CRI80 UGR16 G7  
12.830 Metronome-B 28 26W 3700lm 3000K CRI80 UGR16 G7  
12.840 Metronome-B 28 15W 2200lm 4000K CRI80 UGR16 G7  
12.840 Metronome-B 28 17W 2600lm 4000K CRI80 UGR16 G7  
12.840 Metronome-B 28 20W 2950lm 4000K CRI80 UGR16 G7  
12.840 Metronome-B 28 22W 3300lm 4000K CRI80 UGR16 G7  
12.840 Metronome-B 28 26W 3850lm 4000K CRI80 UGR16 G7

12.830 Metronome-B 28 15W 2250lm 3000K CRI80 UGR19 G7  
12.830 Metronome-B 28 17W 2600lm 3000K CRI80 UGR19 G7  
12.830 Metronome-B 28 20W 3000lm 3000K CRI80 UGR19 G7  
12.830 Metronome-B 28 22W 3350lm 3000K CRI80 UGR19 G7  
12.830 Metronome-B 28 26W 3950lm 3000K CRI80 UGR19 G7  
12.840 Metronome-B 28 15W 2350lm 4000K CRI80 UGR19 G7  
12.840 Metronome-B 28 17W 2750lm 4000K CRI80 UGR19 G7  
12.840 Metronome-B 28 20W 3150lm 4000K CRI80 UGR19 G7  
12.840 Metronome-B 28 22W 3550lm 4000K CRI80 UGR19 G7  
12.840 Metronome-B 28 26W 4150lm 4000K CRI80 UGR19 G7

12.830 Metronome-B 36 17W 2350lm 3000K CRI80 UGR16 G7  
12.830 Metronome-B 36 19W 2750lm 3000K CRI80 UGR16 G7  
12.830 Metronome-B 36 22W 3150lm 3000K CRI80 UGR16 G7  
12.830 Metronome-B 36 25W 3550lm 3000K CRI80 UGR16 G7  
12.830 Metronome-B 36 29W 4150lm 3000K CRI80 UGR16 G7  
12.840 Metronome-B 36 17W 2500lm 4000K CRI80 UGR16 G7  
12.840 Metronome-B 36 19W 2900lm 4000K CRI80 UGR16 G7  
12.840 Metronome-B 36 22W 3300lm 4000K CRI80 UGR16 G7  
12.840 Metronome-B 36 25W 3750lm 4000K CRI80 UGR16 G7  
12.840 Metronome-B 36 29W 4350lm 4000K CRI80 UGR16 G7

12.830 Metronome-B 36 17W 2550lm 3000K CRI80 UGR19 G7  
12.830 Metronome-B 36 19W 2950lm 3000K CRI80 UGR19 G7  
12.830 Metronome-B 36 22W 3350lm 3000K CRI80 UGR19 G7  
12.830 Metronome-B 36 25W 3800lm 3000K CRI80 UGR19 G7  
12.830 Metronome-B 36 29W 4400lm 3000K CRI80 UGR19 G7  
12.840 Metronome-B 36 17W 2650lm 4000K CRI80 UGR19 G7  
12.840 Metronome-B 36 19W 3100lm 4000K CRI80 UGR19 G7

12.840 Metronome-B 36 22W 3550lm 4000K CRI80 UGR19 G7

12.840 Metronome-B 36 25W 4000lm 4000K CRI80 UGR19 G7

12.840 Metronome-B 36 29W 4650lm 4000K CRI80 UGR19 G7