

METRONOME-K

Metronome-K is a linear LED luminaire equipped with 20, 28, or 36 lenses, recessed behind a grid louver. This LED luminaire offers a completely new lighting solution for effective illumination with an architectural aesthetic. A choice can be made between UGR< 19 optics (standard) and UGR< 16.

- Architectural aesthetic with 20, 28, or 36 optics
- Choice between UGR< 19 and UGR< 16 optics
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths





Downloads

[Photometrics Metronome-K](#)


Categories: [Climate ceiling fixtures](#)



PRODUCT IMAGES

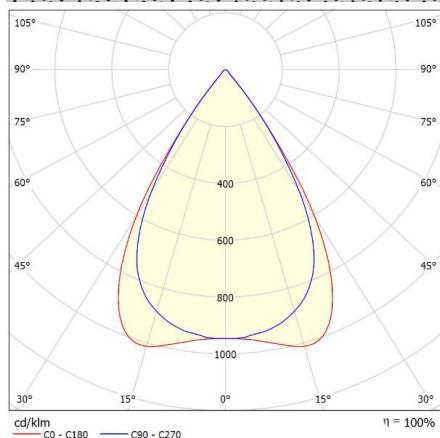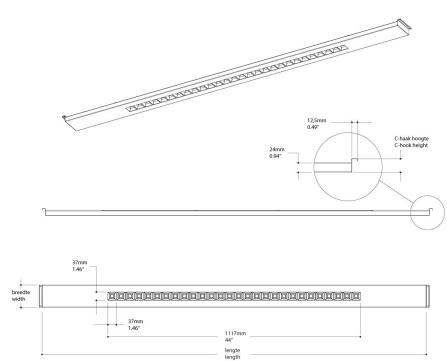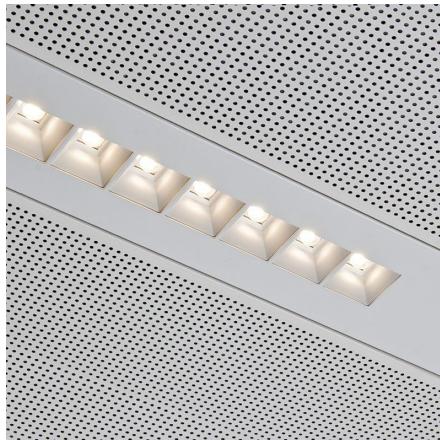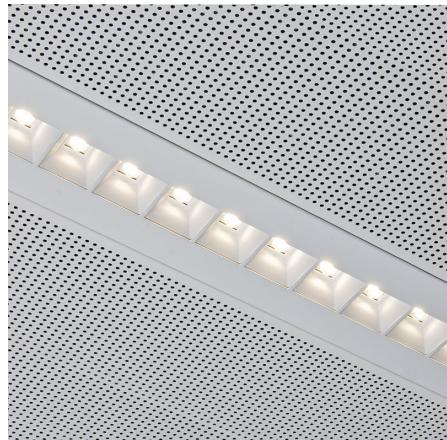

f-waardering volgens UGR													
		Perspectief dwars t.o.v. lampenpas					Perspectief langs t.o.v. lampenpas						
		X	Y	2H	3H	4H	8H	12H	2H	3H	4H	8H	12H
μ Plafond	70	70	50	50	30	70	70	50	50	30	70	70	50
μ Muren	50	30	50	30	30	50	30	50	30	30	30	50	30
μ Vloer	20	20	20	20	20	20	20	20	20	20	20	20	20
Ruimteafmeting													
X													
Y													
2H	16.7	17.4	16.9	17.6	17.8	16.0	16.7	16.2	16.8	17.0			
3H	16.6	17.2	16.9	17.5	17.7	15.9	16.5	16.2	16.7	17.0			
4H	16.5	17.1	16.9	17.4	17.6	15.8	16.4	16.1	16.7	16.9			
8H	16.4	17.0	16.8	17.2	17.5	15.7	16.3	16.1	16.5	16.6			
12H	16.4	17.0	16.8	17.2	17.5	15.7	16.2	16.1	16.5	16.8			
4H	16.5	17.1	16.8	17.4	17.5	15.8	16.4	16.1	16.6	16.8			
3H	16.4	16.9	16.8	17.2	17.5	15.7	16.2	16.1	16.5	16.8			
4H	16.3	16.8	16.6	17.1	17.5	15.6	16.1	16.0	16.4	16.8			
8H	16.3	16.7	16.7	17.0	17.4	15.6	15.9	16.0	16.3	16.7			
12H	16.3	16.5	16.7	16.9	17.3	15.6	15.8	16.0	16.2	16.7			
8H	16.3	16.6	16.7	17.0	17.4	15.6	15.9	16.0	16.3	16.7			
6H	16.2	16.5	16.7	16.9	17.3	15.5	15.8	16.0	16.2	16.6			
4H	16.2	16.4	16.6	16.8	17.3	15.5	15.7	16.0	16.1	16.6			
8H	16.2	16.3	16.5	16.7	17.0	15.5	15.7	16.0	16.1	16.6			
12H	16.2	16.4	16.6	16.8	17.3	15.5	15.7	16.0	16.1	16.6			
4H	16.3	16.5	16.7	16.9	17.3	15.6	15.8	16.0	16.2	16.6			
6H	16.2	16.4	16.6	16.8	17.3	15.5	15.7	16.0	16.1	16.6			
8H	16.1	16.3	16.6	16.8	17.2	15.5	15.6	15.9	16.1	16.6			
Variatie op waarmepositie voor lampafstand 5:													
S = 1.0H		+5.6	/ -8.4				+5.2	/ -7.9					
S = 1.5H		+8.4	/ -3.2				+7.9	/ -8.8					
S = 2.0H		+10.4	/ -10.5				+9.9	/ -9.7					
Standaardtafel										BK00			
Correctie-opticaal										-1.9			
Gecorrigeerde verbindingsindicatie in relatie tot 4096lm Totalle lichtstroom										-2.6			

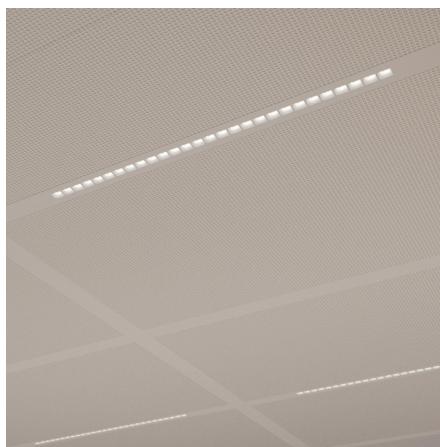

Metronome-K is a linear LED luminaire equipped with 20, 28, or 36 lenses, recessed behind a grid louver. This LED luminaire offers a completely new lighting solution for effective illumination with an architectural aesthetic. A choice can be made between UGR< 19 optics (standard) and UGR< 16.

- Architectural aesthetic with 20, 28, or 36 optics
- Choice between UGR< 19 and UGR< 16 optics
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

Downloads

[Photometrics Metronome-K](#)

NOTES

ADDITIONAL INFORMATION

Driver positie	Attached to the fixture, Loose driver
Producttoepassing	Education, Hospitality, Office, Public spaces
Shape	Rectangular
Energielabel	A++
Glare (UGR)	<19
Kleurtemperatuur	Tunable White, 2700K
Length	
Voltage / frequency	220-240V, 50 / 60Hz
Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Color Rendering Index (CRI)	CRI90, CRI80
Material	Steel
Productkleur	On request
Light control	1-10V dimming, Casambi dimming, DALI dimming
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Self-adhesive dust cover	Optional
Spot bundle (FWHM)	
Air extraction	Optional
Family	Metronome
Armatuurefficiëntie	>140lm/W
Bevestiging	Recessed
Optics	Lens en louver
Breedte	
Packaging dimensions	Bulk packaging
CIE Flux code	96 99 100 100 100
Powerfactor	>0.9
Isolatieklasse	Class II
Ambient temperature	-20°C / +40°C
Kleurconsistentie (SDCM)	SDCM=3

Oriëntatie	Down
IP-class	IP20 (upwards)/IP40 (downwards)
Photobiological safety	IEC 62471: RG1 (low risk)
Specificaties	G8A1 / 06-02-2025

