

METRONOME-M SQUARE

Metronome-M square is a square LED fixture with 32 recessed lenses positioned behind a grid-shaped louver. This innovative lighting fixture provides effective illumination and adds elegance to any architectural environment. Customers can choose from two different optics: the standard UGR19 or the UGR16. The fixtures are made from powder-coated steel and are custom-made for each ceiling system.

- Architectural design with 32 optics
- Choice between UGR< 19 and UGR< 16 optics
- Louver in matte black and matte white
- Flat design for shallow ceiling depths



Downloads

[Photometrics Metronome square](#)

Categories: [Recessed and lay-in luminaires](#)



PRODUCT IMAGES

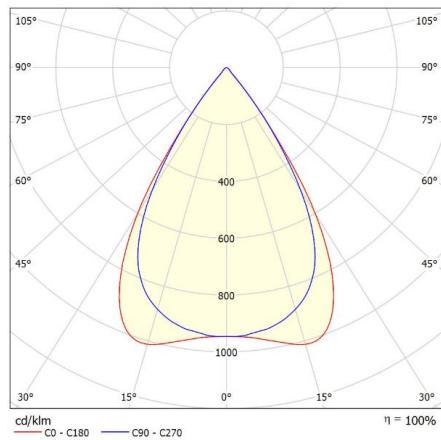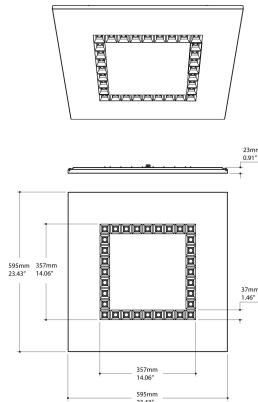

Glare Evaluation According to UGR												
		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
Room Size	X	Y	70	70	50	50	30	70	70	50	50	30
p Ceiling	70	15.6	15.4	15.9	15.6	16.8	15.4	16.2	15.7	16.4	16.6	
p Walls	50	20	15.6	15.3	15.9	15.5	16.8	15.4	16.1	15.7	16.3	16.5
p Floor	20	20	20	20	20	20	20	20	20	20	20	20
2H	2H	15.6	15.4	15.9	15.6	16.8	15.4	16.2	15.7	16.4	16.6	
3H	15.6	15.3	15.9	15.5	16.8	15.4	16.1	15.7	16.3	16.3	16.5	
4H	15.6	15.2	15.9	15.5	16.7	15.3	16.0	15.6	16.2	16.2	16.5	
6H	15.2	15.1	15.6	15.4	16.4	15.2	15.9	15.6	16.2	16.4	16.4	
8H	15.5	15.0	15.8	15.3	16.6	15.2	15.9	15.6	16.1	16.1	16.4	
12H	15.4	15.0	15.8	15.3	16.6	15.2	15.8	15.6	16.1	16.1	16.4	
2H	2H	15.5	15.1	15.8	15.4	16.7	15.3	15.9	15.6	16.2	16.4	
3H	15.5	15.0	15.8	15.3	16.6	15.2	15.8	15.6	16.1	16.1	16.4	
4H	15.5	15.9	15.8	15.3	16.6	15.2	15.7	15.6	16.0	16.4	16.4	
6H	15.1	15.3	15.6	15.3	16.5	15.2	15.9	15.6	16.1	16.3	16.3	
8H	15.4	15.7	15.8	15.1	16.5	15.2	15.5	15.6	15.9	16.3	16.3	
12H	15.3	15.7	15.8	15.1	16.5	15.1	15.4	15.6	15.8	16.3	16.3	
8H	4H	15.4	15.7	15.8	16.1	16.5	15.1	15.5	15.6	15.9	16.3	
6H	6H	15.3	15.6	15.8	16.0	16.5	15.1	15.4	15.5	15.8	16.2	
8H	8H	15.3	15.5	15.8	16.0	16.4	15.1	15.3	15.5	15.7	16.2	
12H	12H	15.3	15.4	15.7	15.9	16.4	15.0	15.2	15.5	15.7	16.2	
8H	4H	15.2	15.5	15.7	16.0	16.4	15.1	15.3	15.5	15.8	16.2	
6H	6H	15.3	15.5	15.7	16.0	16.4	15.1	15.3	15.5	15.7	16.2	
8H	8H	15.3	15.4	15.7	16.0	16.4	15.1	15.3	15.5	15.7	16.2	
12H	12H	15.3	15.4	15.7	16.0	16.4	15.0	15.2	15.5	15.7	16.2	
Variation of the observer position for the luminaire distance S												
S = 1.0H		+3.5	/	-6.8			+3.9	/	-6.8			
S = 1.5H		+5.5	/	-7.2			+6.0	/	-7.2			
S = 2.0H		+7.5	/	-7.7			+7.9	/	-7.7			
Standard table		BK00					BK00					
Correction		-2.9					-3.1					
Corrected Glare Indices referring to 3862lm Total Luminous Flux												

Metronome-M square is a square LED fixture with 32 recessed lenses positioned behind a grid-shaped louver. This innovative lighting fixture provides effective illumination and adds elegance to any architectural environment. Customers can choose from two different optics: the standard UGR19 or the UGR16. The fixtures are made from powder-coated steel and are custom-made for each ceiling system.

- Architectural design with 32 optics
- Choice between UGR< 19 and UGR< 16 optics
- Louver in matte black and matte white
- Flat design for shallow ceiling depths

Downloads

[Photometrics Metronome square](#)

NOTES

ADDITIONAL INFORMATION

Driver positie	Attached to the fixture, Loose driver
Shape	Rectangular
Energielabel	A++
Glare (UGR)	<19
Kleurtemperatuur	Tunable White, 2700K
Length	595mm
Voltage / frequency	220-240V, 50 / 60Hz
Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Color Rendering Index (CRI)	CRI90, CRI80
Material	Steel
Light control	1-10V dimming, Casambi dimming, DALI dimming
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Productkleur	On request
Producttoepassing	Education, Hospitality, Office, Public spaces
Self-adhesive dust cover	Optional
Spot bundle (FWHM)	
Air extraction	Optional
Family	Metronome
Armatuurefficiëntie	>140lm/W
Bevestiging	Recessed
Optics	Lens en louver
Breedte	595mm
Packaging dimensions	Bulk packaging
CIE Flux code	96 99 100 100 100
Powerfactor	>0.9
Isolatieklasse	Class II
Ambient temperature	-20°C / +40°C
Kleurconsistentie (SDCM)	SDCM=3

Oriëntatie	Down
IP-class	IP20 (upwards)/IP40 (downwards)
Photobiological safety	IEC 62471: RG1 (low risk)

