



MOONGLOW ROUND 290

Moonglow round 290 is a surface-mounted fixture with a decorative luminous disc-shaped acrylic diffuser.

- Effective lighting with decorative architectural appeal
- Wall or ceiling mount
- Matte black or matte white finish
- IK6 impact resistant for use in corridors and stairwells
- Emergency lighting version available


Downloads

[Photometrics Moonglow round 290 BIM files](#) [Photometrics Moonglow round 290](#)

Categories: [Surface-mounted luminaires](#)



PRODUCT IMAGES

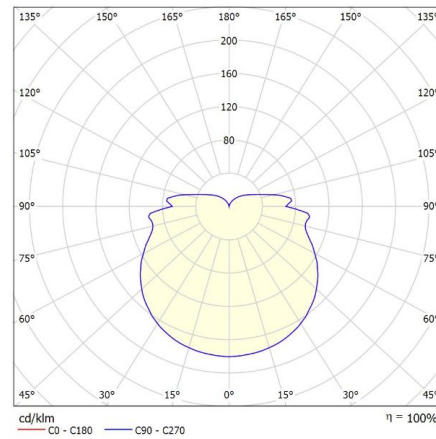

Moonglow round 290 is a surface-mounted fixture with a decorative luminous disc-shaped acrylic diffuser.

- Effective lighting with decorative architectural appeal
- Wall or ceiling mount
- Matte black or matte white finish
- IK6 impact resistant for use in corridors and stairwells
- Emergency lighting version available

Downloads

[Photometrics Moonglow round 290 BIM files](#) [Photometrics Moonglow round 290](#)

NOTES

ADDITIONAL INFORMATION

Air extraction	N/A
Armaturefficiëntie	>80lm/W
Bevestiging	ceiling mounting, wall mounted
Breedte	50mm
CIE Flux code	93 100 100 100 100
Driver positie	Integrated
Energielabel	A+
Family	Moonglow
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	N/A
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class II
Kleurconsistentie (SDCM)	SDCM=3
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI)	CRI90, CRI80
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Luchtafzuiging	n.v.t.
Material	Acrylic, Steel
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Ambient temperature	-20°C / +40°C
Optics	Opalen diffusor
Oriëntatie	Adjustable, Down, Up+Down
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Productkleur	On request
Producttoepassing	Education, Exhibition spaces, Hospitality, Office, Public spaces, Retail
Self-adhesive dust cover	Optional
Verpakkingsafmetingen	Bulkverpakking

Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Voltage / frequentie	220-240V, 50 / 60Hz
Shape	Round
Cut-out size	∅170mm
Zelfklevende stofkap	Optioneel

PHOTOMETRIC DATA

Moonglow Round 290 11W 1000lm 3000K CRI80 G8
Moonglow Round 290 11W 1050lm 4000K CRI80 G8
Moonglow Round 290 15W 1300lm 3000K CRI80 G8
Moonglow Round 290 15W 1400lm 4000K CRI80 G8
Moonglow Round 290 20W 1650lm 3000K CRI80 G8
Moonglow Round 290 20W 1700lm 4000K CRI80 G8
Moonglow Round 290 HO 24W 1950lm 3000K CRI80 G8
Moonglow Round 290 HO 24W 2000lm 4000K CRI80 G8
Moonglow Round 290 HO 33W 2500lm 3000K CRI80 G8
Moonglow Round 290 HO 33W 2600lm 4000K CRI80 G8

Downloads

[Photometrics Moonglow round 290 BIM files](#) [Photometrics Moonglow round 290](#)

DOWNLOADS

Downloads

[Photometrics Moonglow round 290 BIM files](#) [Photometrics Moonglow round 290](#)