



MYOS-MOS MULTIOPTIC® SUSPENSION SYSTEM




Myos-MOS Multioptic® Suspension system is an innovative pendant luminaire featuring mid-power LED modules utilizing Multioptic® lens technology. It contains LED modules with 33 power LEDs each behind a decorative diaphragm mask. All modules can be customized as required, including up-light, downlight, or both in a single module. Its linkable design makes it ideal for spaces without suspended ceilings.

- Excellent UGR < 19 task lighting with low glare according to EN-12.464/1 for use in offices
- Finished in a decorative matte white or matte black textured coating

Categories: [Pendant luminaires](#)



PRODUCT IMAGES

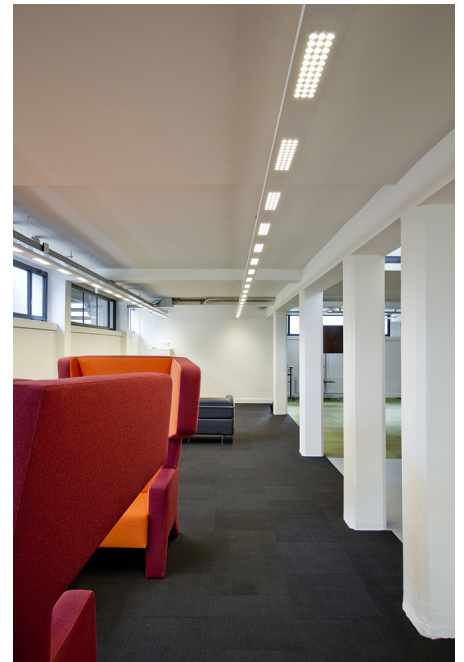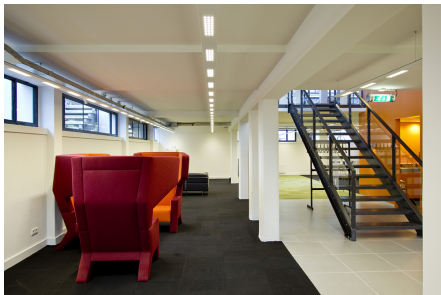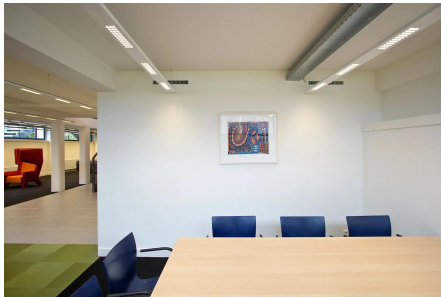

Myos-MOS Multioptic® Suspension system is an innovative pendant luminaire featuring mid-power LED modules utilizing Multioptic® lens technology. It contains LED modules with 33 power LEDs each behind a decorative diaphragm mask. All modules can be customized as required, including up-light, downlight, or both in a single module. Its linkable design makes it ideal for spaces without suspended ceilings.

- Excellent UGR < 19 task lighting with low glare according to EN-12.464/1 for use in offices
- Finished in a decorative matte white or matte black textured coating

NOTES

ADDITIONAL INFORMATION

Air extraction	N/A
Armaturefficiëntie	>140lm/W
Bevestiging	pendant
Breedte	90mm
CIE Flux code	93 100 100 100 100
Driver positie	Integrated
Energielabel	A++
Family	Myos
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	<19
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class II, Class-I
Kleurconsistentie (SDCM)	SDCM=3
Kleurtemperatuur	3000K, 4000K
Color Rendering Index (CRI)	CRI90, CRI80
Length	1710mm
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Luchtafzuiging	n.v.t.
Material	Acrylic, Steel
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Ambient temperature	-20°C / +40°C
Optics	Multioptic® lenstechnologie
Oriëntatie	Down, Up+Down
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	On request, Kabel, On the driver
Productkleur	On request
Producttoepassing	Education, Hospitality, Office, Public spaces
Self-adhesive dust cover	Optional
Verpakkingsafmetingen	Bulkverpakking

Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Voltage / frequentie	220-240V, 50 / 60Hz
Shape	Rectangular
Zelfklevende stofkap	Optioneel

LDT / PHOTOMETRICS DOWNLOADS

LDT / Photometrics downloads

All downloads can be found centrally per family at

<https://atomis.nl/ldt-photometrics/>