



NANO 35 WHITE

Nano 35 is a directional & recessed spotlight with a 36° lens. This spotlight is an elegant miniature recessed spot that can be used both as a directional spot and recessed spotlight.

- Miniature adjustable spotlight (ø35mm) that can also be pushed up until it sits completely recessed in the ceiling
- Equipped with a 36° FWHM lens
- High color rendering index (CRI>90)>
- On-off version, DALI dimmable and Casambi dimmable versions available


Downloads

[Photometrics Nano 35](#)

Categories: [Downlights and recessed spotlights](#)



PRODUCT IMAGES

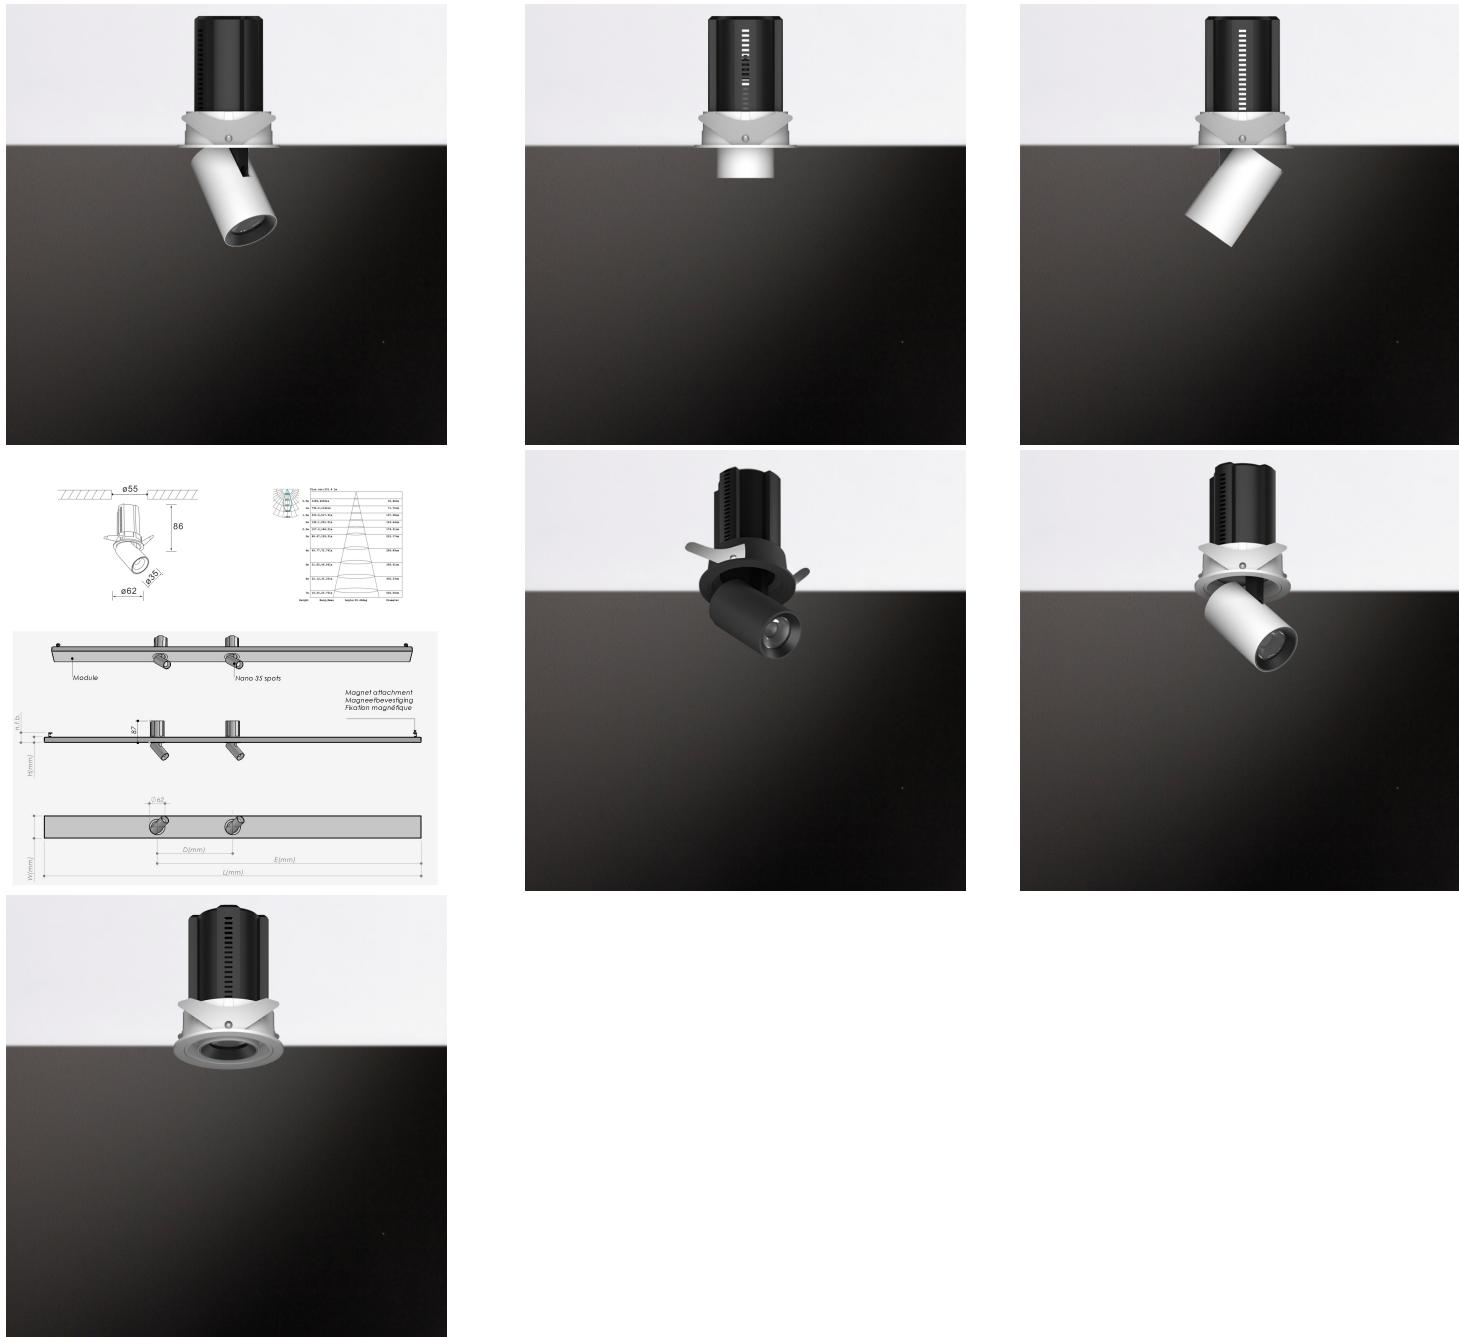

Nano 35 is a directional & recessed spotlight with a 36° lens. This spotlight is an elegant miniature recessed spot that can be used both as a directional spot and recessed spotlight.

- Miniature adjustable spotlight (ø35mm) that can also be pushed up until it sits completely recessed in the ceiling
- Equipped with a 36° FWHM lens
- High color rendering index (CRI>90)>
- On-off version, DALI dimmable and Casambi dimmable versions available

Downloads

[Photometrics Nano 35](#)

NOTES

ADDITIONAL INFORMATION

Isolatieklasse	Class-I
Energielabel	A++
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Color Rendering Index (CRI)	CRI97
Packaging dimensions	Bulk packaging
Glare (UGR)	Not applicable
Light control	1-10V dimming, Casambi dimming, DALI dimming
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Air extraction	N/A
Driver positie	Loose driver
Family	Nano
Armatuurefficiëntie	>70lm/W
Kleurconsistentie (SDCM)	SDCM=2
Voltage / frequency	220-240V, 50 / 60Hz
Producttoepassing	Education, Exhibition spaces, Hospitality, Office, Public spaces, Retail
Material	Steel
Powerfactor	>0.9
Spot bundle (FWHM)	15°, 17°, 24°, 40°
Ambient temperature	-20°C / +40°C
Optics	Lens
Oriëntatie	Down
Shape	Round
Bevestiging	Recessed
Photobiological safety	IEC 62471: RG1 (low risc)
ANSI/IES TM-30-18	Erkend

