



SIRIO EASY-KLIMAPLUS®

Sirio Easy-KlimaPlus, a 21.5 mm slim linear lighting fixture with lenses for use in Interalu Sirio Easy-KlimaPlus® ceilings.

- Fully integrated into [Interalu](#) Easy Klima Plus® ceilings
- Easy installation with magnetic mounting
- Available in three lengths 900, 1200 and 1500
- Unique lens configuration UGR 19 office-compliant


Downloads

[Photometrics Sirio EKP](#)

Categories: [Climate ceiling fixtures](#), [Baffle luminaires](#)



PRODUCT IMAGES

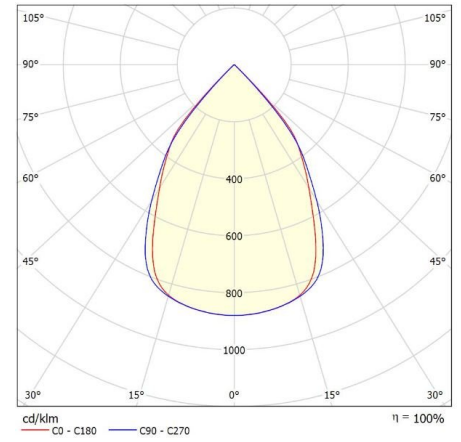

Sirio Easy-KlimaPlus, a 21.5 mm slim linear lighting fixture with lenses for use in Interalu Sirio Easy-KlimaPlus® ceilings.

- Fully integrated into [Interalu](#) Easy Klima Plus® ceilings
- Easy installation with magnetic mounting
- Available in three lengths 900, 1200 and 1500
- Unique lens configuration UGR 19 office-compliant

Downloads

[Photometrics Sirio EKP](#)

NOTES

ADDITIONAL INFORMATION

| | |
|------------------------------------|---|
| Air extraction | N/A |
| Armaturefficiëntie | >125lm/W |
| Bevestiging | Recessed |
| CIE Flux code | 93 100 100 100 100 |
| Driver positie | Loose driver |
| Energielabel | A++ |
| Family | Sirio |
| Photobiological safety | IEC 62471: RG1 (low risc) |
| Glare (UGR) | <19 |
| IP-class | IP20 (upwards)/IP40 (downwards) |
| Isolatieklasse | Class II |
| Kleurconsistentie (SDCM) | SDCM=3 |
| Kleurtemperatuur | Tunable White, 2700K, 3000K, 3500K, 4000K |
| Color Rendering Index (CRI) | CRI90, CRI80 |
| Light control | 1-10V dimming, Casambi dimming, DALI dimming, Optional |
| Luchtafzuiging | n.v.t. |
| Material | Acrylic, Steel |
| Emergency lighting | 1 hour emergency power, Optional, Optional 1 hour autonomy self-test |
| Ambient temperature | -20°C / +40°C |
| Optics | Lens en louver |
| Oriëntatie | Down |
| Packaging dimensions | Bulk packaging |
| Powerfactor | >9 |
| Primaire aansluitingen | BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver |
| Productkleur | On request |
| Producttoepassing | Education, Hospitality, Office, Public spaces |
| Self-adhesive dust cover | Optional |
| Specificaties | G7D1 / 06-02-2025 |
| Verpakkingsafmetingen | Bulkverpakking |

| | |
|-----------------------------|--------------------------|
| Verwachte levensduur | L90B50@60,000h (Tq 25°C) |
| Voltage / frequentie | 220-240V, 50 / 60Hz |
| Shape | Rectangular |
| Zelfklevende stofkap | Optioneel |

