



SIRIO SAPP 600



A linear lighting fixture with lenses for use in Interlu SAPP® ceiling. Sirio SAPP 600 can be placed between the structures, creating an integrated system with the ceiling, without interrupting the architectural appearance.

- Can be placed anywhere in the ceiling between the SAPP® ceiling structures without interrupting the climate circuit
- Provides a highly controlled light distribution, good uniformity and UGR < 19
- The fixture complies with NEN-EN 12464-1

Categories: [Baffle luminaires](#), [Climate ceiling fixtures](#)



PRODUCT IMAGES

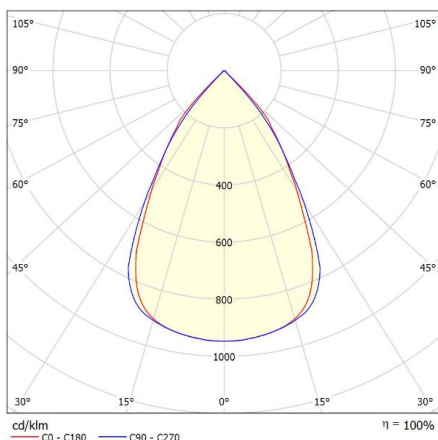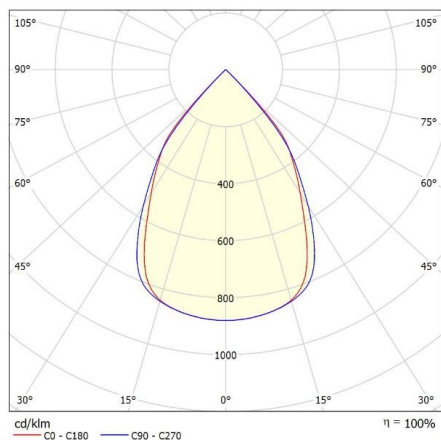

Glare Evaluation According to UGR													
p Ceiling		70	70	50	50	30	30	70	70	50	50	30	
p Walls		50	30	50	30	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis					
2H	2H	18.7	19.4	18.9	19.6	19.8	18.3	19.0	18.5	19.2	19.4	19.4	
	3H	18.6	19.2	18.8	19.4	19.7	18.1	18.8	18.4	19.0	19.2	19.2	
	4H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2	19.2	
	6H	18.4	19.0	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1	19.1	
	12H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0	19.0	
4H	2H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2	19.2	
	3H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0	19.0	
	4H	18.3	18.7	18.6	19.0	19.4	17.9	18.3	18.2	18.6	19.0	19.0	
	6H	18.2	18.6	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9	18.9	
	8H	18.2	18.5	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9	18.9	
8H	2H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.2	18.4	18.8	18.8	
	4H	18.2	18.5	18.6	18.9	19.3	17.7	18.1	18.2	18.4	18.8	18.8	
	6H	18.1	18.3	18.5	18.7	19.2	17.7	17.9	18.1	18.3	18.8	18.8	
	8H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7	18.7	
	12H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7	18.7	
12H	4H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.1	18.4	18.8	18.8	
	6H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7	18.7	
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7	18.7	
Variation of the observer position for the luminance distances S													
S = 1.0H		+3.8	-12.2		+4.7	-13.4							
S = 1.5H		+6.5	-14.3		+7.5	-14.8							
S = 2.0H		+8.5	-15.6		+9.5	-15.5							
Standard table		BK00						BK00					
Correction Summand		0.0						-0.4					
Corrected Glare indices referring to 328lm Total Luminous Flux													

A linear lighting fixture with lenses for use in Interlu SAPP® ceiling. Sirio SAPP 600 can be placed between the structures, creating an integrated system with the ceiling, without interrupting the architectural appearance.

- Can be placed anywhere in the ceiling between the SAPP® ceiling structures without interrupting the climate circuit
- Provides a highly controlled light distribution, good uniformity and UGR < 19
- The fixture complies with NEN-EN 12464-1

NOTES

ADDITIONAL INFORMATION

Air extraction	N/A
Armaturefficiëntie	>125lm/W
Bevestiging	Recessed
CIE Flux code	93 100 100 100 100
Driver positie	Loose driver
Energielabel	A++
Family	Sirio
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	<19
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class II
Kleurconsistentie (SDCM)	SDCM=3
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI)	CRI90, CRI80
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Luchtafzuiging	n.v.t.
Material	Acrylic, Steel
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Ambient temperature	-20°C / +40°C
Optics	Lens en louver
Oriëntatie	Down
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Productkleur	On request
Producttoepassing	Education, Hospitality, Office, Public spaces
Self-adhesive dust cover	Optional
Verpakkingsafmetingen	Bulkverpakking
Verwachte levensduur	L90B50@60,000h (Tq 25°C)

Voltage / frequentie	220-240V, 50 / 60Hz
Shape	Rectangular
Zelfklevende stofkap	Optioneel

LDT / PHOTOMETRICS DOWNLOADS

LDT / Photometrics downloads

All downloads can be found centrally per family at

<https://atomis.nl/ldt-photometrics/>