



## **ZENDER**

Zender, a wall-mounted LED fixture, is designed for architectural indoor lighting of vertical surfaces such as walls, corridors and stairs. Light emitted by an internally mounted LED strip directed toward the wall is first diffused by a double frosted diffuser and then reflected upward and downward, creating a softly illuminated wall.

- Robust design fixture for wall mounting suitable for corridors and entrance halls in public spaces of schools, etc.
- Available in 300 mm wide and 600 mm wide sizes
- Emergency versions available
- Can be mounted horizontally and vertically


### **Downloads**

[Photometrics Zender BIM files Zender](#)

**Categories:** [Surface-mounted luminaires](#)



## PRODUCT IMAGES

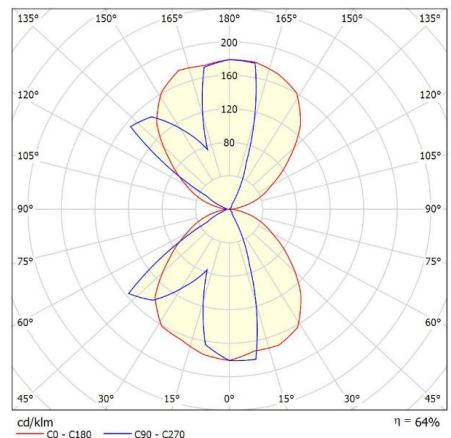

Zender, a wall-mounted LED fixture, is designed for architectural indoor lighting of vertical surfaces such as walls, corridors and stairs. Light emitted by an internally mounted LED strip directed toward the wall is first diffused by a double frosted diffuser and then reflected upward and downward, creating a softly illuminated wall.

- Robust design fixture for wall mounting suitable for corridors and entrance halls in public spaces of schools, etc.
- Available in 300 mm wide and 600 mm wide sizes
- Emergency versions available

- Can be mounted horizontally and vertically

## **Downloads**

[Photometrics](#) [Zender](#) [BIM files](#) [Zender](#)

## **NOTES**

---

---

---

---

---

## ADDITIONAL INFORMATION

|                                 |  |
|---------------------------------|--|
| <b>Isolatieklasse</b>           | Class-I  |
| <b>Energielabel</b>             | A++  |
| <b>Kleurtemperatuur</b>         | Tunable White, 2700K, 3000K, 3500K, 4000K                                |
| <b>IP-class</b>                 | IP20 (upwards)/IP40 (downwards)  |
| <b>Light control</b>            | 1-10V dimming, Casambi dimming, DALI dimming                             |
| <b>Emergency lighting</b>       | 1 hour emergency power, Optional, Optional 1 hour autonomy self-test     |
| <b>Primaire aansluitingen</b>   | On request, On the driver  |
| <b>Packaging dimensions</b>     | Bulk packaging   |
| <b>Air extraction</b>           | N/A  |
| <b>Family</b>                   | Zender   |
| <b>Armatuurefficiëntie</b>      | >100lm/W   |
| <b>Producttoepassing</b>        | Education, Exhibition spaces, Hospitality, Office, Public spaces, Retail |
| <b>CIE Flux code</b>            | N/A  |
| <b>Kleurconsistentie (SDCM)</b> | SDCM=3   |
| <b>Material</b>                 | Acrylic, Steel   |
| <b>Ambient temperature</b>      | -20°C / +40°C  |
| <b>Shape</b>                    | Rectangular  |
| <b>Bevestiging</b>              | Wall mounting  |
| <b>Optics</b>                   | Opalen diffusor  |
| <b>Driver positie</b>           | Integrated   |
| <b>Glare (UGR)</b>              | Not applicable   |
| <b>Photobiological safety</b>   | IEC 62471: RG1 (low risc)  |

## **PHOTOMETRIC DATA**

Zender 300 10W 950lm 3000K CRI80

Zender 300 10W 1000lm 4000K CRI80

Zender 600 19W 1900lm 3000K CRI80

Zender 600 19W 2050lm 4000K CRI80