

ZUMO CONTOUR SPOT


The Zumo Contour spot is an LED spotlight with a contour projector, suitable for standard 3-circuit track systems. The spot features a powerful LED with a high color rendering index (CRI > 97).

- Can be used on standard high-voltage tracks
- High CRI (> 97) color rendering index
- Stroboscopic-free dimming (according to IEEE 1789) on the spot
- Particularly suitable for lighting galleries, museums and exhibition spaces

Categories: [Track luminaires](#)



PRODUCT IMAGES

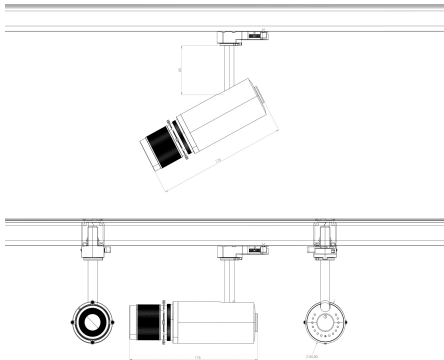

The Zumo Contour spot is an LED spotlight with a contour projector, suitable for standard 3-circuit track systems. The spot features a powerful LED with a high color rendering index (CRI > 97).

- Can be used on standard high-voltage tracks
- High CRI (> 97) color rendering index
- Stroboscopic-free dimming (according to IEEE 1789) on the spot
- Particularly suitable for lighting galleries, museums and exhibition spaces

NOTES

ADDITIONAL INFORMATION

Air extraction	N/A
Armaturefficiëntie	>35lm/W
Bevestiging	track
CIE Flux code	93 100 100 100 100
Driver positie	Integrated
Energielabel	A++
Family	Zumo
Photobiological safety	IEC 62471: RG1 (low risc)
Glare (UGR)	N/A
IP-class	IP20 (upwards)/IP40 (downwards)
Isolatieklasse	Class-I
Kleurconsistentie (SDCM)	SDCM=2
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Color Rendering Index (CRI)	CRI97
Light control	1-10V dimming, Casambi dimming, DALI dimming, Optional
Luchtafzuiging	n.v.t.
Material	Acrylic, Aluminium
Emergency lighting	N/A
Ambient temperature	-20°C / +40°C
Optics	Zoom lens
Oriëntatie	Adjustable
Packaging dimensions	Bulk packaging
Powerfactor	>9
Primaire aansluitingen	On request, Fase track
Productkleur	On request
Producttoepassing	Education, Exhibition spaces, Hospitality, Office, Public spaces, Retail
Self-adhesive dust cover	Optional
Verpakkingsafmetingen	Bulkverpakking
Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Voltage / frequentie	220-240V, 50 / 60Hz

Shape

Round

Zelfklevende stofkap

Optioneel

PHOTOMETRIC DATA

Zumo Contour 60 15W 400lm 3000K CRI92

Zumo Contour 60 15W 450lm 4000K CRI92

Zumo Contour 90 21W 500lm 3000K CRI92

Zumo Contour 90 21W 550lm 4000K CRI92

LDT / PHOTOMETRICS DOWNLOADS

LDT / Photometrics downloads

All downloads can be found centrally per family at

<https://atomis.nl/ldt-photometrics/>