


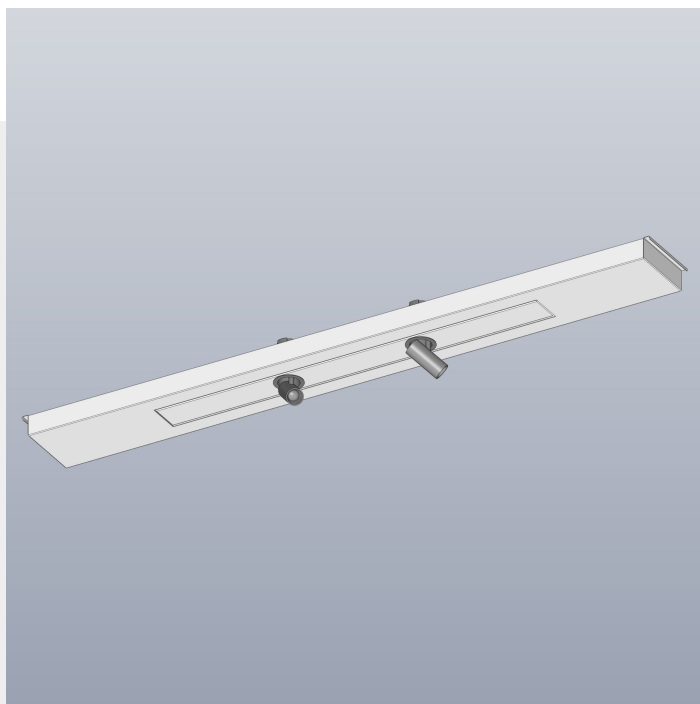

## DUO-SPOT MODULE





Duo-spot module is a rectangular panel equipped with two adjustable LED spots. The spots can be individually directed. When the spot is directed downward, it can also be slid upward into the luminaire opening, so it does not protrude below the frame.

- Easy installation with magnetic attachment
- Two individually adjustable spots at a 300mm spacing
- Available in matte black or matte white finish

**Categorieën:** [Refurbishment en Retrofit armaturen](#)



## PRODUCT IMAGES

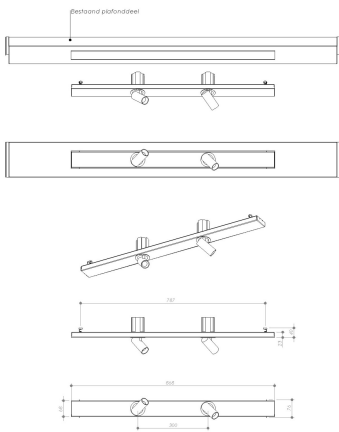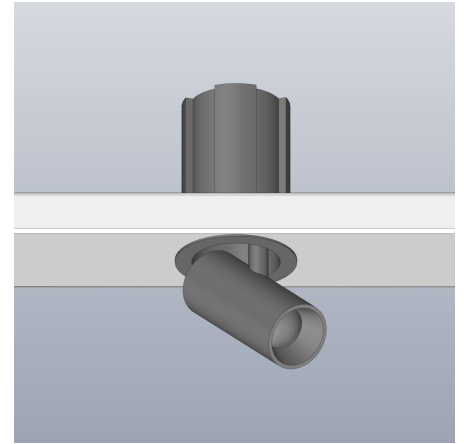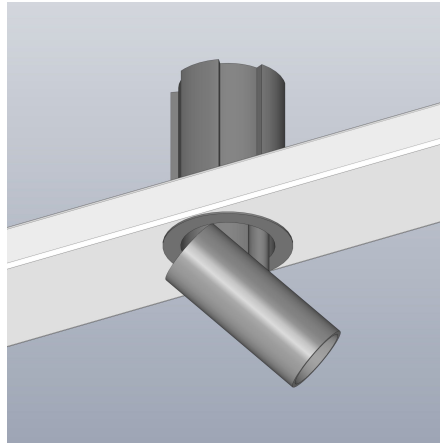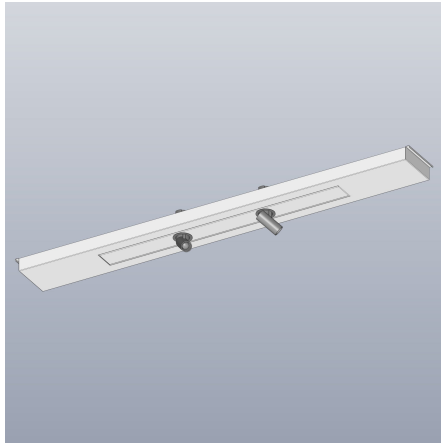

Duo-spot module is a rectangular panel equipped with two adjustable LED spots. The spots can be individually directed. When the spot is directed downward, it can also be slid upward into the luminaire opening, so it does not protrude below the frame.

- Easy installation with magnetic attachment
- Two individually adjustable spots at a 300mm spacing
- Available in matte black or matte white finish

**OPMERKINGEN:**

---

---

---

---

---

---

## ADDITIONAL INFORMATION

|                                   |                                                                      |
|-----------------------------------|----------------------------------------------------------------------|
| <b>Driver positie</b>             | Losliggende driver                                                   |
| <b>Lichtregeling</b>              | 1-10V gedimd, Casambi gedimd, DALI gedimd, Optioneel                 |
| <b>Materiaal</b>                  | Plastic, Staal                                                       |
| <b>Oriëntatie</b>                 | Omlaag, Richtbaar                                                    |
| <b>Vorm</b>                       | Rechthoekig                                                          |
| <b>Isolatieklasse</b>             | Klasse-II                                                            |
| <b>Packaging dimensions</b>       | Bulkverpakking                                                       |
| <b>CIE Flux code</b>              | 96 99 100 100 100                                                    |
| <b>Fotobiologische veiligheid</b> | IEC 62471: RG1 (laag risico)                                         |
| <b>Glare (UGR)</b>                | Niet van toepassing                                                  |
| <b>Kleurconsistentie (SDCM)</b>   | SDCM=3                                                               |
| <b>Optiek</b>                     | Lens                                                                 |
| <b>Omgevingstemperatuur</b>       | -20°C / +40°C                                                        |
| <b>Self-adhesive dust cover</b>   | Nee                                                                  |
| <b>Spot bundle (FWHM)</b>         | 24°, 15°, 36°, 60°                                                   |
| <b>Primaire aansluitingen</b>     | GST18i3, GST18i5 pastelblauw, Kabel, Op de driver                    |
| <b>Noodverlichting</b>            | 1 uur noodstroom, Optioneel, Optioneel 1 uur autonomie autotest      |
| <b>Productkleur</b>               | Mat wit, Mat zwart, Op aanvraag                                      |
| <b>Bevestiging</b>                | Inbouw                                                               |
| <b>Kleurtemperatuur</b>           | 2700K, 3000K, 3500K, 4000K                                           |
| <b>Kleurweergaveindex (CRI)</b>   | CRI80, CRI90, CRI97                                                  |
| <b>Producttoepassing</b>          | Expositieruimtes, Gemeentehuizen, Horeca, Kantoor, Onderwijs, Retail |
| <b>Lengte</b>                     |                                                                      |
| <b>Breedte</b>                    |                                                                      |
| <b>Verwachte levensduur</b>       | L90B50@60.000h (Tq 25°C)                                             |
| <b>Voltage / frequency</b>        | 220-240V, 50 / 60Hz                                                  |
| <b>Powerfactor</b>                | >0.9                                                                 |
| <b>IP-class</b>                   | Niet van toepassing                                                  |
| <b>Energie label</b>              | A++                                                                  |

