



ULTRALIGHT-SAPP

Ultralight-SAPP is an elegant, slim LED luminaire equipped with a row of mid-power LEDs, each featuring an individual lens and louvre. This luminaire is specially designed for use in linear lamella ceilings.


- Elegant slim line design for the use in linear lamella ceilings
- Excellent low-glare light task lighting according to EN-12.464/1 for use in offices
- Available in a decorative matt white or matt white textured coating

Downloads





[Photometrics Ultralight](#)

Create your own custom made product, download the PDF specsheet or add to quote:

Categorieën: [Lamel armaturen](#)



PRODUCT IMAGES

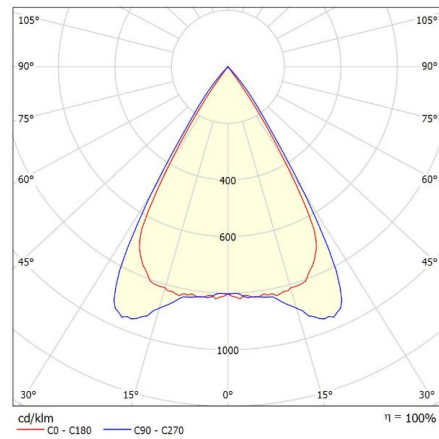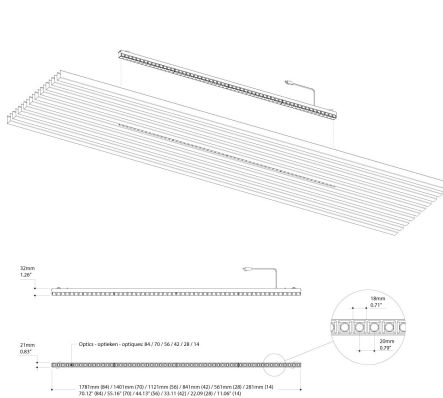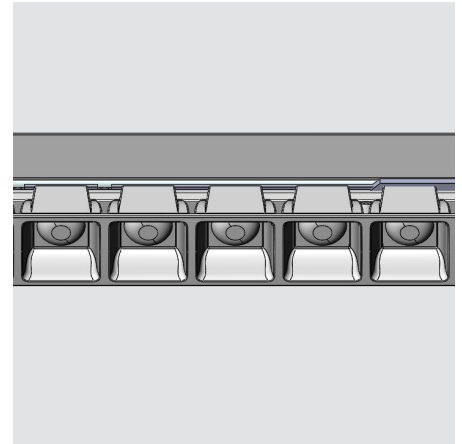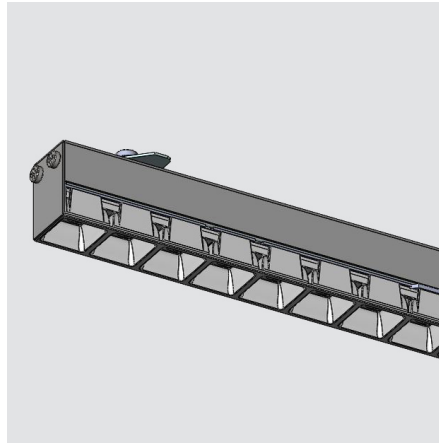

f-waardering volgens UGR													
p Plafond	70	70	50	50	30	70	70	50	50	30	30	30	
p Muren	50	30	50	30	30	50	30	50	30	30	50	30	
p Voor	20	20	20	20	20	20	20	20	20	20	20	20	
Ruimteafmeting X Y	Perspectief divars t.o.v. lampen						Perspectief lens t.o.v. lampen						
2H	2H	15.5	16.1	15.7	16.3	16.5	17.1	17.8	17.4	18.0	18.2		
	3H	15.4	15.9	15.6	16.2	16.4	17.0	17.6	17.3	17.8	18.0		
	4H	15.3	15.8	15.6	16.1	16.3	16.9	17.5	17.2	17.7	18.0		
	6H	15.2	15.7	15.5	16.0	16.3	16.9	17.4	17.2	17.6	17.9		
	8H	15.2	15.6	15.5	15.9	16.2	16.8	17.3	17.2	17.6	17.9		
4H	12H	15.1	15.6	15.5	15.9	16.2	16.8	17.2	17.1	17.5	17.8		
	2H	15.3	15.8	15.6	16.1	16.3	16.9	17.5	17.2	17.7	18.0		
	3H	15.1	15.6	15.5	15.9	16.2	16.8	17.2	17.1	17.5	17.8		
	4H	15.1	15.4	15.4	15.8	16.1	16.7	17.1	17.1	17.4	17.8		
	6H	15.0	15.3	15.4	15.7	16.0	16.6	17.0	17.0	17.3	17.7		
8H	8H	14.9	15.2	15.4	15.6	16.0	16.6	16.9	17.0	17.3	17.7		
	12H	14.9	15.1	15.3	15.5	16.0	16.6	16.8	17.0	17.2	17.6		
	2H	14.9	15.2	15.4	15.6	16.0	16.6	16.9	17.0	17.3	17.7		
	3H	14.9	15.1	15.3	15.5	15.9	16.5	16.7	17.0	17.1	17.6		
	4H	14.8	15.0	15.3	15.4	15.9	16.5	16.6	16.9	17.1	17.5		
12H	12H	14.9	14.9	15.2	15.4	15.9	16.4	16.5	16.9	17.0	17.5		
	4H	14.9	15.1	15.3	15.5	16.0	16.6	16.8	17.0	17.2	17.6		
	6H	14.8	15.0	15.3	15.4	15.9	16.5	16.6	16.9	17.1	17.5		
	8H	14.8	14.8	15.1	15.2	15.4	15.9	16.4	16.5	16.9	17.0	17.5	
	Variatie op waarnemerspositie voor lampstanden S												
S = 1.0H		+5.7	/	-22.8			+5.2	/	-23.3				
S = 1.5H		+8.3	/	-23.3			+7.9	/	-23.7				
S = 2.0H		+10.3	/	-23.8			+9.8	/	-24.1				
Standaardtabel		BK00						BK00					
Correctie-optel													
		-3.2						-1.6					
Gecorrigeerde verblindingindicatie in relatie tot 2121lm Totale lichtstroom													

Ultralight-SAPP is an elegant, slim LED luminaire equipped with a row of mid-power LEDs, each featuring an individual lens and louvre. This luminaire is specially designed for use in linear lamella ceilings.

- Elegant slim line design for the use in linear lamella ceilings
- Excellent low-glare light task lighting according to EN-12.464/1 for use in offices
- Available in a decorative matt white or matt white textured coating

Downloads

[Photometrics Ultralight](#)

Create your own custom made product, download the PDF specsheat or add to quote:

OPMERKINGEN:

ADDITIONAL INFORMATION

Driver positie	Losliggende driver
Producttoepassing	Gemeentehuizen, Horeca, Kantoor, Onderwijs, Retail
Vorm	Rechthoekig
IP-class	IP20 (naar boven)/IP40 (naar beneden)
Fotobiologische veiligheid	IEC 62471: RG1 (laag risico)
Kleurconsistentie (SDCM)	SDCM=3
Omgevingstemperatuur	-20°C / +40°C
Kleurtemperatuur	Tunable White, 2700K, 3000K, 3500K, 4000K
Lichtregeling	1-10V gedimd, Casambi gedimd, DALI gedimd, Optioneel
Noodverlichting	1 uur noodstroom, Optioneel, Optioneel 1 uur autonomie autotest
Primaire aansluitingen	GST18i3, GST18i5 pastelblauw, Kabel, Op de driver
Productkleur	Op aanvraag, RAL9010 mat, RAL9010 mat structuur, RAL9011 mat, RAL9011 mat structuur, RAL9016 mat, RAL9016 mat structuur
Luminaire efficacy	>133lm/W
Air extraction	n.v.t.
Bevestiging	Plafondmontage
Optiek	Lens en louver
Materiaal	Plastic, Staal
Lengte	
Breedte	21mm
Packaging dimensions	Bulkverpakking
Kleurweergaveindex (CRI)	CRI80, CRI90
Glare (UGR)	<19
CIE Flux code	100 100 100 100 100
Verwachte levensduur	L90B50@60.000h (Tq 25°C)
Voltage / frequency	220-240V, 50 / 60Hz
Powerfactor	>0.9
Isolatieklasse	Klasse-II
Oriëntatie	Omlaag
Self-adhesive dust cover	Nee
Energie label	A++

Hoogte

