

ATOMIS

# Metronome-S white

Metronome-S white is a linear LED pendant luminaire fitted with 36 or 28 lenses, recessed behind a louvre grille. The optics are on the underside as standard, …

| CATEGORY | MOUNTING | IP CLASS |
|---|---|---|
| **Pendant luminaires** | **Pendant** | **IP20 (boven) / IP20 (onder)** |
| **COLOUR TEMPERATURE** | **CRI** | **UGR** |
| **2700K, 3000K, 4000K, Tunable white, op aanvraag** | **CRI80, CRI90** | **<19** |

## Introduction

Metronome-S white is a linear LED pendant luminaire fitted with 36 or 28 lenses, recessed behind a louvre grille. The optics are on the underside as standard, …

With the Metronome-S White, you choose architectural lighting that unites design and light quality. Designed for kantoren, zorg, education, public spaces, vrijetijdssector, the luminaire integrates neatly into the design and delivers comfortable, considered light. Thanks to its thoughtful detailing and high-quality finish, it is a choice that lasts for years — and makes your project look better.

## Features

- Architectural appearance with 36 or 28 optics
- Choice between UGR < 19 and UGR < 16 optics
- Louvre finish in white
- Direct and indirect (UP/DOWN) versions available

# Technical specifications

| | |
|---|---|
| Mounting | **Pendant** |
| Application | **Kantoren, Zorg, Education, Public spaces, Vrijetijdssector** |
| Dimensions | **On request** |
| Material | **Staal (behuizing)** |
| Optics | **Lens met Louver** |
| UGR | **<19** |
| IP class | **IP20 (boven) / IP20 (onder)** |
| CRI | **CRI80, CRI90** |
| CCT | **2700K, 3000K, 4000K, Tunable white, On request** |
| Control | **aan/uit, DALI-2, 1-10v, Casambi, On request** |
| Emergency lighting | **1-hour emergency power, 1 uur autonomie autotest** |
| Service life | **L90@50.000 uur** |
| Voltage / freq. | **220-240V, 50 / 60Hz** |
| Photobiological safety | **IEC 62471: RG1 (low risk)** |
| Insulation class | **Class I** |
| Power factor | **>0.9** |
| Ambient temperature | **-20°C / +40°C** |
| Colour | **RAL9016, RAL9005, On request** |
| Brand | **Atomis** |
| Category | **Pendant luminaires** |

# Product photos


Atmosphere and product images









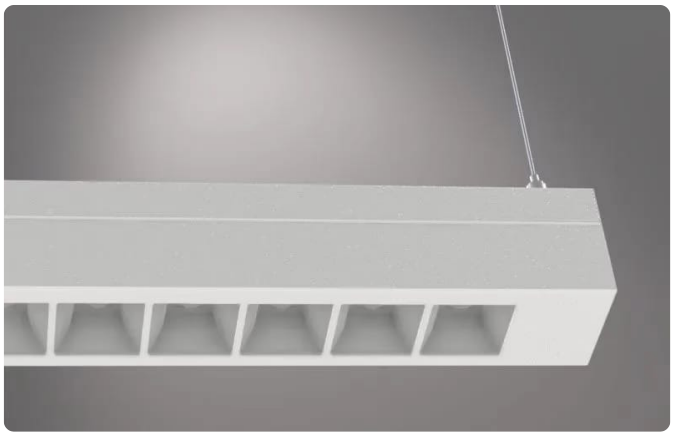

## Specification text

Metronome-S white is a linear LED pendant luminaire fitted with 36 or 28 lenses, recessed behind a louvre grille. The optics are on the underside as standard, and direct/indirect (UP/DOWN) versions are also available. A choice can be made between UGR < 19 optics (standard) and UGR < 16. - Architectural appearance with 36 or 28 optics - Choice between UGR < 19 and UGR < 16 optics - Louvre finish in white - Direct and indirect (UP/DOWN) versions available

# Information

Note

Specifications depend on the project and configuration. Always consult the current technical documentation.

This datasheet is compiled from structured product information based on XML source data and the current source page. Specifications may vary per project configuration.

---

Atomis Architectural Lighting · atomislighting.com · The Netherlands

Generated on 7 November 2026